
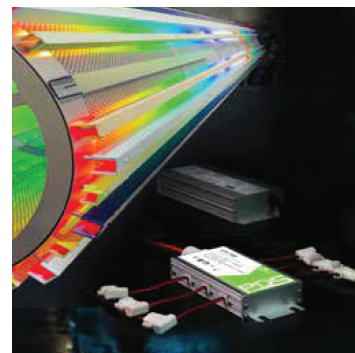


LED POWER SUPPLY

RELIABLE POWER, PROVEN PERFORMANCE

Engineered for stability, efficiency, and long-lasting reliability – our power supplies keep your LED systems running smoothly day and night.

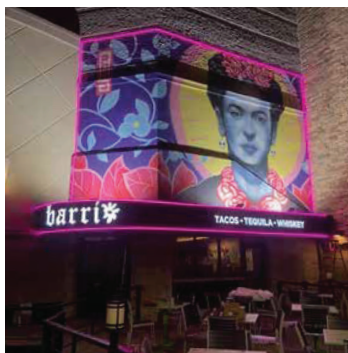

CLASS 2 POWER Supplies

Eco Version: A cost-friendly option.

Premier Version: Features high performance with power efficiency from 88%-92%.

Mini Version: A compact solution suitable for small channel letters.

CLASS P POWER Supply

Provides up to 264W at 12V and up to 320W at 24V.

Can be integrated with the Power Distribution Splitter (PDS) to build a UL Class 2 system, enhancing efficiency and reducing labor requirements.

CATEGORY	MODEL	PART#	OUTPUT VOLTAGE	INPUT VOLTAGE	RATED OUTPUT CURRENT	MAX. OUTPUT POWER	POWER EFFICIENCY	DIMENSIONS (LXWXH)
QIS Power Supplies CLASS 2 TYPE (V1)	G2G-QIS-60W-12VDC	QISPS1001	12VDC	100~277Vac	5A	60W	88%	7.99in × 1.38in × 0.78in
	G2G-QIS-120W-12VDC	QISPS1002	12VDC	100~277Vac	5A × 2	60W × 2	88%	10.08in × 1.77in × 0.90in
	G2G-QIS-100W-24VDC	QISPS2001	24VDC	100~277Vac	4A	100W	92%	10.08in × 1.77in × 0.90in
Power Supplies CLASS 2 TYPE (V4)	G2G-QIS-60-12VDC (V4)	PS1001#4	12VDC	120~277Vac	5A	60W	88%	4.84in × 1.69in × 1.1in
	G2G-QIS-100-24VDC (V4)	PS2001#4	24VDC	120~277Vac	4A	96W	87%	6.14in × 1.69in × 1.18in
	G2G-PS02-60-12 (Mini)	PS4001	12VDC	120~277Vac	5A	60W	90%	6.18in × 0.91in × 0.79in
Power Supplies CLASS P TYPE	G2G-200W-12VDC	PS1003	12VDC	100~277Vac	0~16.67A	200W	91%	9.13in × 2.67in × 1.53in
	G2G-264W-12V	PS1006	12VDC	100~277Vac	0~22.00A	264W	91%	9.07in × 3.85in × 1.65in
	G2G-320W-24V	PS2004	24VDC	100~277Vac	0~13.33A	320W	92%	9.07in × 3.85in × 1.65in