

WOW II

THE NEW GENERATION OF WOW MODULE SERIES

Perfect channel letter solution, the new generation of WOW II modules boast a high efficiency of 165 lm/w, which can achieve light output up to 165 lumens per module.


SPECIFICATIONS

- Designed for small to large channel letters
- 3M double-face tape and mechanical mounting options
- 3"-12" Depth Min
- 7+5 Year Warranty
- 12VDC
- L80 rating of 50,000 hours
- UV Resistant; UV and IR Protected
- High Efficiency

MODULES POPULATION GUIDE

CHANNEL LETTER DEPTH (IN)	MULTIPLE ROWS (ROWS SPACING)	CLEARANCE	MODS PER FT
3"	7"	4"	2
4"	10"	5"	1.5
5"	12"	6"	1.5
6"	15"	7"	1.5

DRAWINGS

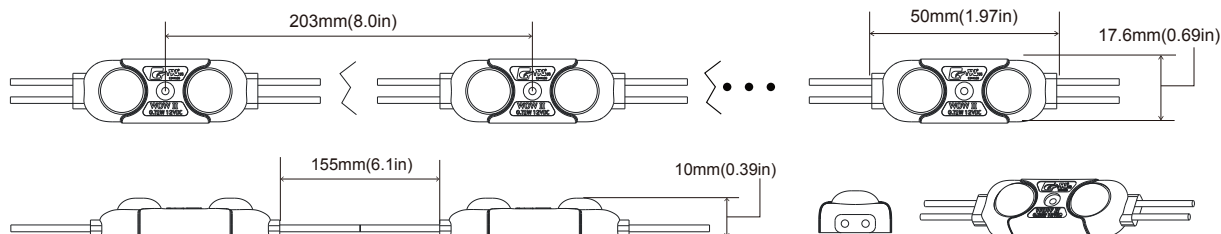

CONSTANT CURRENT

SPECIFICATIONS CHART

SPECIFICATION	DETAILS
Viewing Angle	172° Optics
Input Voltage	12VDC
Watts	0.72w/mod (1.08w/ft.)
Modules/Foot	1.5Mods/ft. fully stretched
Model	HHLED Series
Protection Grade	IP67
Warranty	7 Year (Product) / 5 Year (Labor)
Operating Temp	-40° ~ +60°C / -40° ~ +140°F
Storage Temp	-40° ~ -70°C / -40° ~ +158°F
Cascade	25 mods single-ended power feed, 50 mods double-ended power feed
Packaging	40pcs/chain, 80pcs/bag 10 bags/outer carton

OPTIONS

MODEL	COLOR TEMP	LUMENS
WOW II 7500k	7500K	115.7lm/mod(173.6lm/ft)
WOW II 6300k	6300K	115.7lm/mod(173.6lm/ft)
WOW II 2700k	2700K	113.2lm/mod(169.8lm/ft)